


Specifications:

Current Rating: 2.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 30m ohm. Max.
 Insulation Resistance: 1000M ohm. Min.
 Withstanding Voltage: AC 1000V AC/minute
 Operating Temperature Range: -25°C ~ +125°C
 Material and Finish
 Insulator: High Temp. Plastic (PBT UL94V-0)
 Insulator Color: Beige
 Contact material: Phosphor Bronze
 Finish: Selective Gold Plated
 How to Order
 41612-32AB-FS

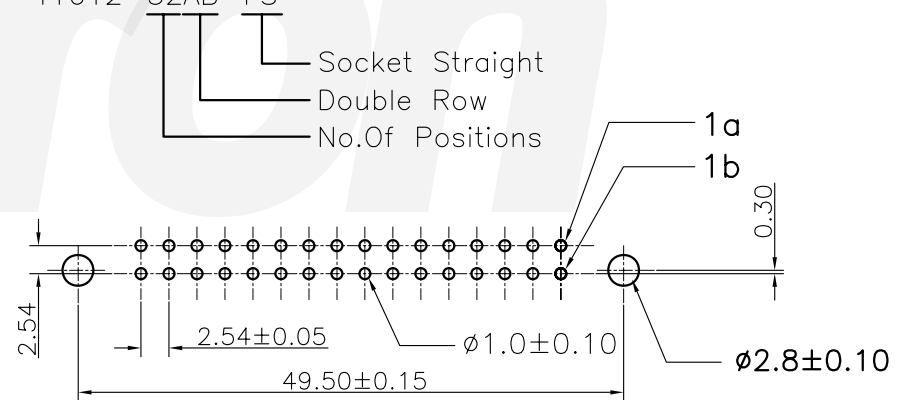

Recommended PCB Layout

RoHS Compliant

F			
E			
D			
C			
B	02-Feb-2007	ECN-CN070201	Wendy
A	10-Jan-2006	(PC0154)	Wendy
REV	DATE	FILE	BY

DRAWN: Jack
CHECKED: Jeremy Liu
APPROVAL: Mike Wu

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
UNIT: MM
SCALE:
SHEET: 1 / 1
PROJECTION:

繼德工業股份有限公司 Neltron Industrial Co., Ltd.		DESCRIPTION: Din 41612 Double Row A+B Socket Straight
		PART NO: 41612-32AB-FS

SIZE A4
