

Positions	Dim. A	Dim. B	Dim. C	Dim. D
32	38.10	48.2	53.2	44.5
64	78.74	88.9	94.2	85.5


Specifications:

Current Rating:2.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:30m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1000V AC For One Minute
 Operating Temperature Range:-25°C ~ +125°C
 Material and Finish
 Insulator:High Temp. Plastic (PBT UL94V-0)
 Contact:Copper Alloy
 Finish:Selective Gold Plated

How to Order

41612-XXAB-MR-F1

Lead Free
 Male Right Angle
 Double Row
 No.Of Positions

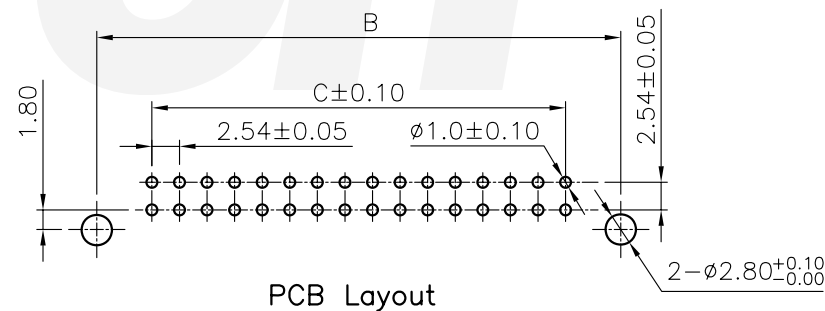

PCB Layout

RoHS Compliant

F				DRAWN: Dxs	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: Din 41612 Double Row A+B Male R/A	SIZE A4
E			CHECKED: Jeremy Liu					
D				APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 41612-32AB-MR-F1		
C					SHEET: 1 / 1			
B					PROJECTION:			
A	08-Mar-2006	(PC0001)	Dxs					
REV	DATE	FILE	BY					