
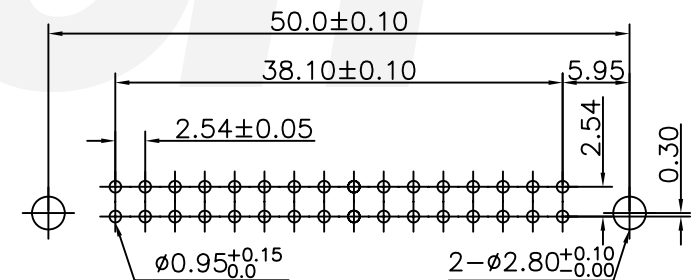


Specifications:

Current Rating: 2.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 30m Ohm Max
 Insulation Resistance: 1000M Ohm Min
 Withstanding Voltage: AC 1000V AC/Minute
 Operating Temperature: -25°C To +125°C
 Materials and Finish:
 Insulator: PBT (UL94V-0)
 Insulator Color: Grey
 Contact: Brass
 Finish: Gold Plated in Contact Area,
 Tin Plated On Solder Tails.

How To Order

41612-32AB-MS-F1

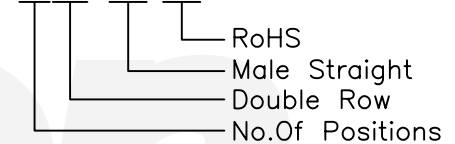

Recommended PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
E				P.D.J	
D				CHECKED:	UNIT: MM
C				Jeremy Liu	SCALE:
B				APPROVAL:	SHEET: 1 / 1
A	07-Aug-2007	(PC0026)	P.D.J	Mike Wu	PROJECTION:
REV	DATE	FILE	BY		

繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
DESCRIPTION:	SIZE
Din 41612 Double Row A+B Male Straight	A4
PART NO:	
41612-32AB-MS-F1	

A
B
C
D