

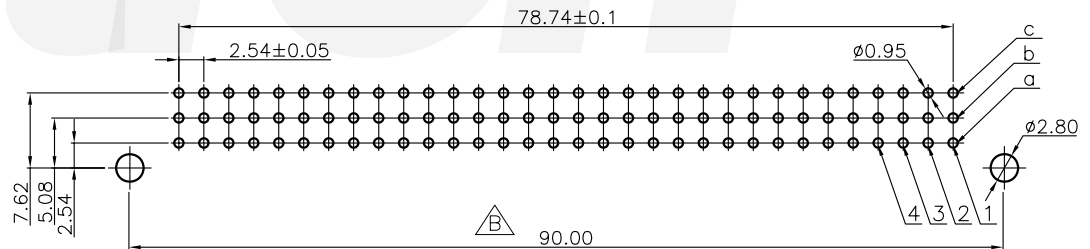
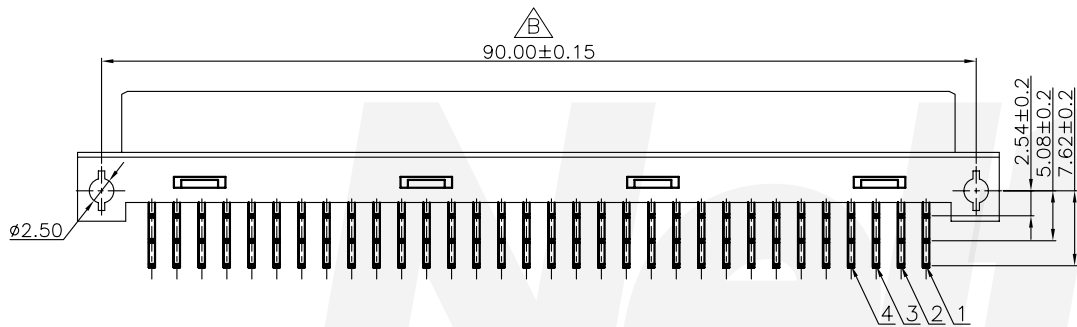
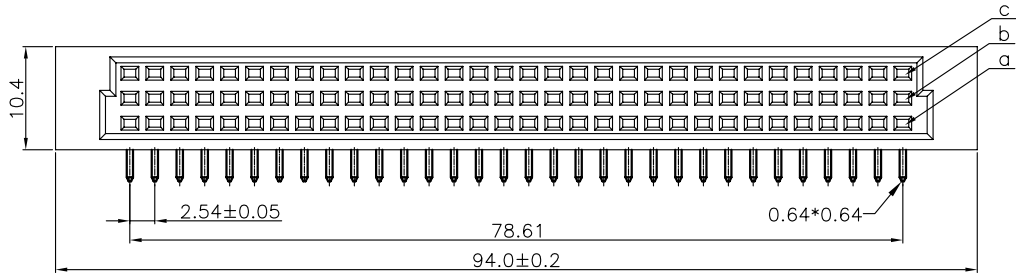
1

2

3

4

5





PCB Layout

Specification
 Current Rating:2.0 Amps Max.
 Voltage Rating:250V AC/DC
 Contact Resistance:30m Ohm.Max
 Insulation Resistance:1000M Ohms Min
 Withstanding Voltage:1000V AC/Minute
 Operating Temperature Range:-25°C TO +125°C
 Material And Finsh
 Insulator:PBT (UL94-0)
 Insulator Color:Beige
 Conact:Phosphor Bronze
 Plating:Selective Gold Plated
 How To Order
 41612-96ABC-FR \triangle

FR:Socket R/A Type
 Three Rows
 No.of Contacts 96

RoHS Compliant

E				DRAWN: Huali	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 41612 DIN Connectors Socket Right Angle Type	SIZE A4
D			CHECKED: Jerrmy Liu					
C				APPROVAL: Mike Wu	SCALE:1/1	PART NO: 41612-96ABC-FR \triangle		
B	30-Jul-2008	ECN-CN080736	Huali		SHEET: 1 / 1			
A	21-Mar-2008	(PUR004)	Huali	PROJECTION: 				
REV	DATE	FILE	BY					