

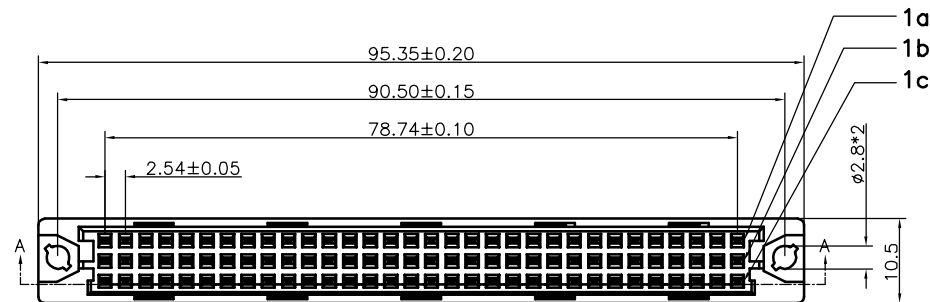
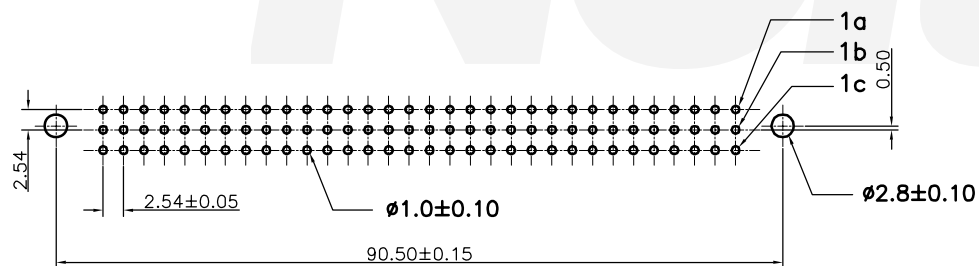


Section:A-A

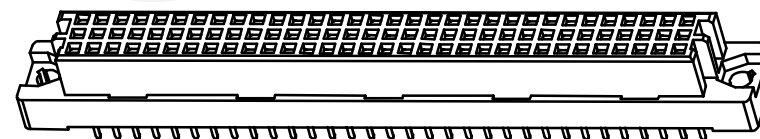

Recommended PCB Layout



Specifications:

Current rating:2.0A AC,DC
Voltage rating:250V AC, DC
Contact tesistance:30m ohm Max
Insulation resistance:1000M ohm Min
Withstanding voltage:AC 1000V AC/minute
Operating Temperature:-25°C ~ +125°C

Materials:

Insulator:High Temp Plastic UL94V-0
Contact material:Phosphor Bronze
Finish:Selective Gold Plated

How to Order

41612-96ABC-FS

Female Straight
Three Row
No.Of Positions

F				DRAWN: Jack	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: Din 41612 Three Row A+B+C Female Straight 96P	SIZE A4
C					SCALE:		
B	29-Jul-2004	ECN-CN-050209	Jack	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 41612-96ABC-FS	
A	16-Aug-2000		Fred Qiu		PROJECTION: 		
REV	DATE	FILE	BY				