
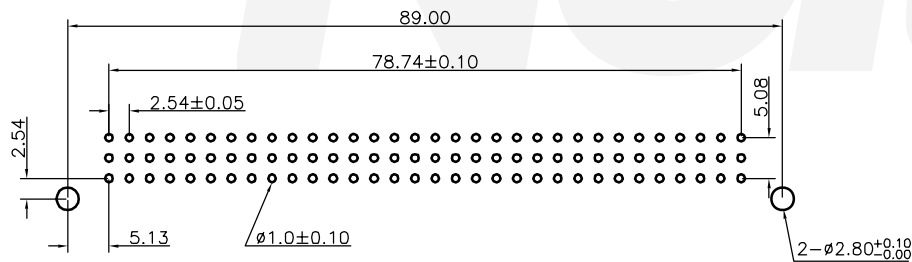


Section:A-A





Recommended PCB Layout

Specifications:

Current rating:2.0A AC,DC
 Voltage rating:250V AC, DC
 Contact resistance:30m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 1000V AC/minute
 Operating Temperature:-25°C ~ +125°C
 Materials:
 Insulator:High Temp Plastic UL94V-0
 Contact material:Copper Alloy
 Finish:Selective Gold Plated

How to Order

41612-96ABC-MR

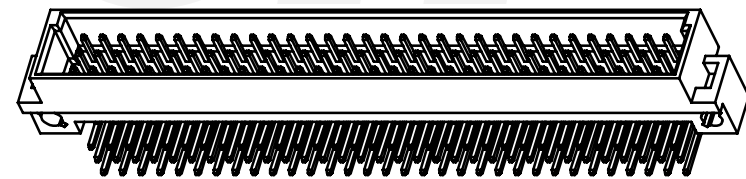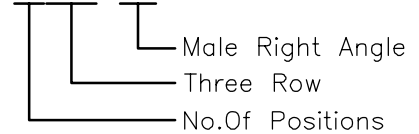

| | | | |
|-----|-------------|---------------|------|
| F | 25-Feb-2005 | ECN-CN-050209 | Jack |
| E | 03-Dec-2003 | ECN031201 | Jack |
| D | 02-Dec-2003 | | Jack |
| C | 14-Oct-2003 | | Jack |
| B | 09-Oct-2003 | | Jack |
| A | 13-Nov-2001 | | Jack |
| REV | DATE | FILE | BY |

| | |
|-----------|------------|
| DRAWN: | Jack |
| CHECKED: | Jeremy Liu |
| APPROVAL: | Mike Wu |

| | |
|--------------------|----------------------|
| GENERAL TOLERANCE: | .X=±0.2 .XX=±0.15 |
| UNIT: | MM |
| SCALE: | |
| SHEET: | 1 / 1 |
| PROJECTION: | |



繼德工業股份有限公司
Neltron Industrial Co., Ltd.

| | |
|--------------|------------------------------------|
| DESCRIPTION: | Din 41612 Three Row A+B+C Male R/A |
| PART NO: | 41612-96ABC-MR |

| | |
|------|-----------|
| SIZE | A4 |
|------|-----------|