


Recommended PCB Layout



Specifications:



Current rating:2.0A AC,DC
 Voltage rating:250V AC, DC
 Contact tesistance:30m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 1000V AC/minute
 Operating Temperature:-25°C ~ +125°C

Materials:

Insulator:High Temp Plastic UL94V-0
 Contact material:Copper Alloy
 Finish:Selective Gold Plated

How to Order

41612-96ABC-MS

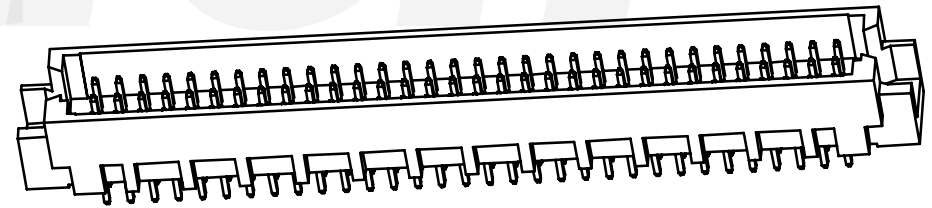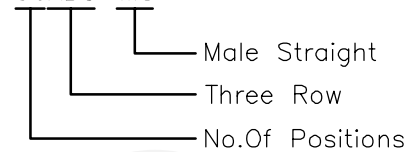

F			
E			
D			
C			
B	14-Mar-2005	ECN-CN-050209	Jack
A	18-Jan-2000		Fred Qiu
REV	DATE	FILE	BY

DRAWN:	Jack
CHECKED:	Jeremy Liu
APPROVAL:	Mike Wu

GENERAL TOLERANCE:	.X=±0.2 .XX=±0.15
UNIT: MM	
SCALE:	
SHEET: 1 / 1	
PROJECTION:	

繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
DESCRIPTION:	Din 41612 Three Row A+B+C Male Straight
PART NO:	41612-96ABC-MS

SIZE	A4